


OPTIONS
INSID AND
OUTSIDE RADIUS

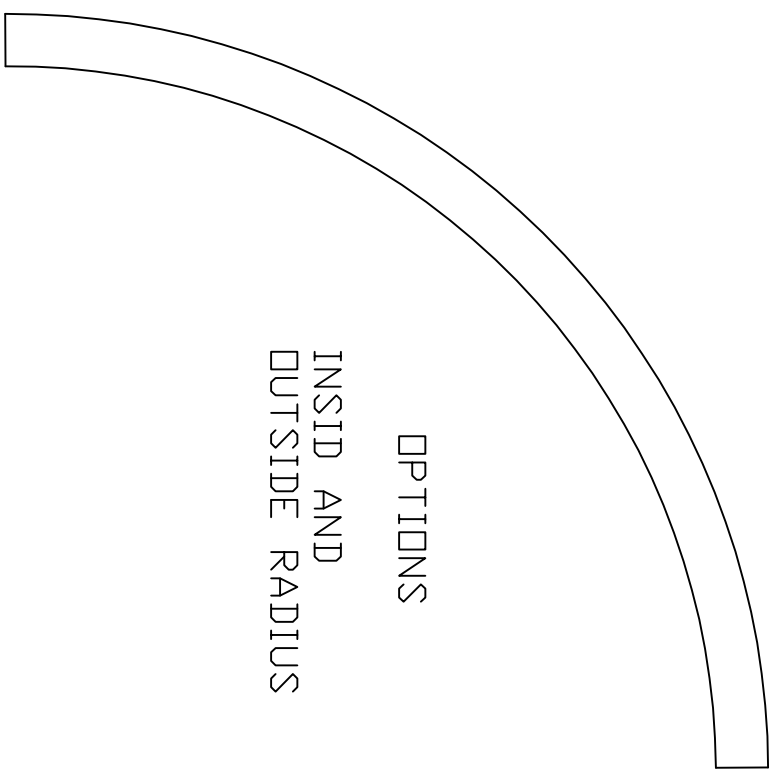

FOR MR, MRT, CHAIN, TAB CHAIN			T-RAIL				
STRENGTH	"A"	"B"	WGT. PER FT	STRENGTH	"A"	"B"	"C"
2	9/16"	2-11/16"	3LB/FT	LIGHT DUTY	1-1/16"	5/8"	1-5/8"
4	13/16"	4-5/16"	8LB/FT	LIGHT DUTY	1-1/16"	5/8"	1-5/8"
6	1-1/16"	4-5/16"	10LB/FT	MEDIUM DUTY	1-1/16"	1-7/32"	3"
8	1-5/16"	4-5/16"	11-3/4LB/FT	MEDIUM DUTY	1-1/16"	1-7/32"	3"
12	1-15/16"	4-5/16"	17-1/4LB/FT	HEAVY DUTY	2"	1-3/8"	3-5/8"
16	2-9/16"	4-5/16"	26-1/4LB/FT	HEAVY DUTY	2"	1-3/8"	3-5/8"

Puritan Magnetics, Inc.
465 S. Glaspie St., Unit B
Oxford, MI 48371
Ph: 248-628-3808
Fax: 248-628-3844
www.puritanmagnetics.com
magnet@puritanmagnetics.com

ALL INFORMATION DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY PURITAN MAGNETICS INC. ALL DESIGN, MANUFACTURE, USE, REPRODUCTION AND SALE RIGHTS ARE RESERVED BY PURITAN MAGNETICS INC.

DES BR:	CH	DET BR:	CH
SHEET:	10F1	TITLE:	RAIL
DATE:	12/09/05	SCALE:	NTS
465 GLASPIE RD, UNIT B OXFORD, MI 48371		PURITAN MAGNETICS, INC.	
DWG NO		RAIL-BROCH.	